

One of the world's leading  
manufacturers of automated  
cleaning & handling equipment

**NEWSMITH**

[www.newsmiths.co.uk](http://www.newsmiths.co.uk)


Rotary Jet 750



Rotary Jet 1000



Rotary Jet 2000

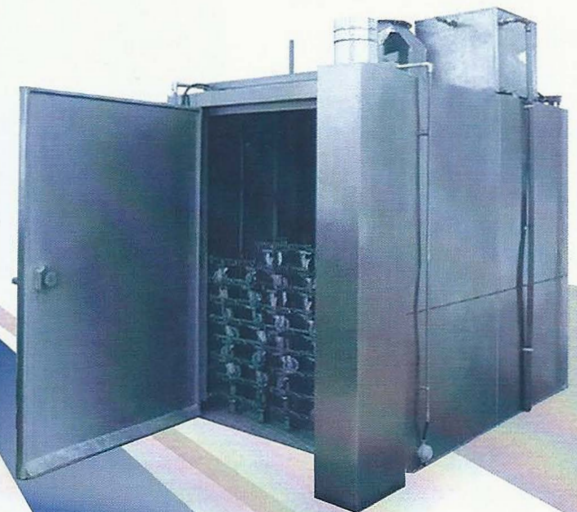

## Rotary Jet Series

**Batch washing machine for trays,  
bins and racks**

- Machine body constructed entirely from stainless steel
  - High pressure recirculated wash
- Available in two door configuration for pass through operation

**Tel: +44 (0) 1924 405988**

One of the world's leading manufacturers of automated cleaning & handling equipment



**Standard Features**

- High power wash by rotary spray jets on each side
- Steam, electric or gas available on all models
- Available with non-standard door-widths or increased/decreased cabinet sizes for specific applications



ROTARY JET	750	1000	2000
<b>Depth</b>	1435mm (plus 840mm with door open)	1980mm (plus 1200mm with door open)	2896mm (plus 1350mm with door open)
<b>Width</b>	1435mm (overall)	1828mm (overall)	1980mm (overall)
<b>Height</b>	2768mm (overall)	2883mm (overall)	3176mm (overall)
<b>Wash Pump Motor</b>	5.5kW (7½ hp)	2 x 4kW (5½ hp)	2 x 5.5kW (7½ hp)
<b>Wash Recirculation Tank</b>	287 Litre (62 gallons)	910 Litre (200 gallons)	1600 Litre (350 gallons)
<b>Rinse Consumption</b>	3.32 Litres per 10 second cycle	5 Litres per 10 second cycle	6.6 Litres per 10 second cycle
<b>Steam Extract Fan</b>	0.55kW (¾hp)	0.55kW (¾hp)	0.55kW (¾hp)
<b>Water Filler</b>	¾" bsp	¾" bsp	¾" bsp
<b>Hot Rinse Feed</b>	¾" bsp	¾" bsp	¾" bsp
<b>Waste Outlet</b>	2" bsp	2" bsp	2" bsp
<b>Overflow</b>	1¼" bsp	1¼" bsp	1¼" bsp
<b>Steam Vent</b>	254mm (10" to atmosphere)	305mm (12" to atmosphere)	305mm (12" to atmosphere)
<b>Door Width</b>	740mm	1040mm	1190mm
<b>Wash Area* (d x w x h)</b>	740 x 1020 x 1830mm	1040 x 1450 x 1830mm	1190 x 2285 x 1980mm
<b>Total Electrical Load**</b>	35.5kW (standard electric heated machine)	9.55kW (standard steam heated machine)	11.55kW (standard steam heated machine)

\*Wash area can be configured to suit customer requirements.  
 \*\*Optional rinse booster pump (0.37kW) and extract fan (0.55kW) can be fitted.

0eo61e"o0ge" c mdgb0eL m xmo6dmco5

t )y )6)y ) ) )¼yl)6)1 )

l )tl) )¼yl ))55ax5)  
 1 )( L)5) &1559)wteLWcc) ))&cd9)wck5c5

1 g) l L )  
 L L

